



LINE

Original shaped cladding frames the firebox, giving the appliance a particularly innovative look that goes hand in hand with the latest technology.

COLOURS ▾



GENERAL TECHNICAL CHARACTERISTICS

Multifuel System®
Three speed forced ventilation system.
Warm air ducting up to 16 m

Multifunction remote control
LCD display, timer, thermostat and Multicomfort function

Programming
Daily, weekly and weekend modes.
Dual time settings

Remote Control System
Optional kit for remote control of stove with a simple SMS

Structure
Enamelled steel with door, brazier and firebox in cast iron

Majolica cladding
Unique large hand-made pieces

Air Glass System
Self-cleaning ceramic glass resistant up to 750°C


Energy Saving
Quick and easy maintenance, removable ash drawer

Wellness
Humidifier with aroma diffuser

Eco function
Automatic power control of the fire

Pellet Level Sensor
Allows to monitor the amount of pellet in the hopper, displaying an alert when refilling is required.

TECHNICAL DRAWING

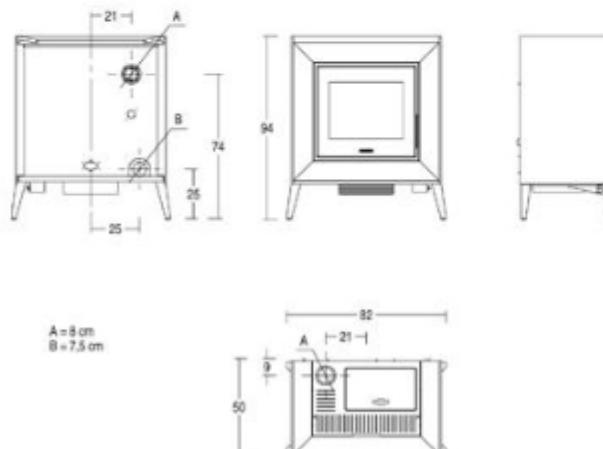

TECHNICAL DATA

Room heating capacity (min-max)	m ²	155 - 265
Rated heat output (min-max)	kW	3.5 - 9.2
Power adjustable (positions)		4
Nominal thermal efficiency	%	88,5
Consumption at rated heat output (min-max)	Kg/h	0,6 - 2,2
Dimensions WxDxH	cm	82x50x94
Cladding/front		majolica
Top		majolica - steel
Firebox		steel
Baffle plate/Firebox/Brazier		cast iron
Flue outlet Ø	cm	8 - central rear
Flue direction options		top left
Ash drawer		removable
Door		cast iron
Ceramic glass		self-cleaning resistant up to 750°C
Door handle		hide away and detachable
Hopper capacity	Kg	18
Humidifier in stainless steel		yes
Oven in stainless steel (LxWxH)	cm	no
Multifuel System®		3 levels speed
Dual Power		no
Remote control		display LCD
Stove control panel		with digital control
Timer/thermostat with programming		Daily, weekly and week-end with two times
Remote Control System		optional
Front air vents orientable		-
Lateral vents		no
Minimum power consumption	Watt	100
Maximum power consumption	Watt	380
Total weight	Kg	150

Calculated based on nominal heat output and refers to rooms with a thermal requirement between 0.060 and 0.035 kW per m².

The availability of models may vary from Country to Country.

Poichè l'azienda è costantemente impegnata nel continuo perfezionamento di tutta la sua produzione, le caratteristiche estetiche e dimensionali, i dati tecnici e gli accessori possono essere soggetti a variazione.

Numero Verde
800-842026
www.piazzetta.it

 **PIAZZETTA**
PASSIONE ACCESA