



P957

This stove, with its linear, minimalist, is great for heating medium size spaces.

COLOURS ▾



GENERAL TECHNICAL CHARACTERISTICS

Multifuel System®
Three speed forced ventilation system.
Warm air ducting up to 16 m

Multifunction remote control
LCD display, timer, thermostat and Multicomfort function

Programming
Daily, weekly and weekend modes.
Dual time settings

Remote Control System
Optional kit for remote control of stove with a simple SMS

Structure
Enamelled steel with door, brazier and firebox in cast iron,
hidden handle


Majolica cladding
Unique large hand-made pieces

Air Glass System
Self-cleaning ceramic glass resistant up to 750°C


Easy Cleaning
Quick and easy maintenance, removable ash drawer

Wellness
Humidifier with aroma diffuser

TECHNICAL DRAWING

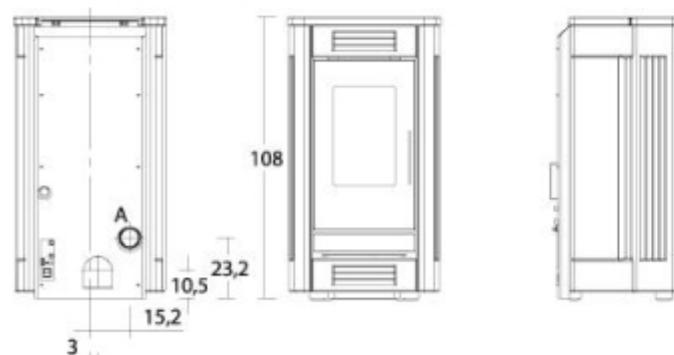

A = SCARICO Ø 8



TECHNICAL DATA

| | | |
|--|----------------|---------------------------------------|
| Room heating capacity (min-max) | m ³ | 150 - 255 |
| Rated heat output (min-max) | kW | 2,9 - 8,9 |
| Power adjustable (positions) | | 4 |
| Nominal thermal efficiency | % | 90,1 |
| Consumption at rated heat output (min-max) | Kg/h | 0,7 - 2,2 |
| Dimensions WxDxH | cm | 58 x 52 x 108 |
| Cladding/Door | | majolica |
| Top | | majolica - steel |
| Firebox | | steel |
| Baffle plate/Firebox/Brazier | | cast iron |
| Flue outlet Ø | cm | 8 |
| Flue direction options | | |
| Ash drawer | | removable |
| Door | | cast iron-steel |
| Ceramic glass | | resistant up to 750°C |
| Door handle | | steel |
| Hopper capacity | Kg | 18 |
| Humidifier in stainless steel | | yes |
| Oven in stainless steel (LxWxH) | cm | no |
| Multifuel System® | | 3 levels speed |
| Dual Power | | no |
| Remote control | | display LCD |
| Stove control panel | | with digital control |
| Timer-thermostat with programming | | daily, weekly and week-end with times |
| Remote Control System | | optional |
| Front air vents orientable | | si - si |
| Lateral vents | | |
| Minimum power consumption | Watt | 100 |
| Maximum power consumption | Watt | 380 |
| Total weight | Kg | 181 |

Calculated based on nominal heat output and refers to rooms with a thermal requirement between 0.060 and 0.035 kW per m².

The availability of models may vary from Country to Country.

Poiché l'azienda è costantemente impegnata nel continuo perfezionamento di tutta la sua produzione, le caratteristiche estetiche e dimensionali, i dati tecnici e gli accessori possono essere soggetti a variazione.

Numeri Verde
800-842026
www.piazzetta.it

PIAZZETTA
PASSIONE ACCESA