



P937

This appliance features original contours in a celebration of aesthetic minimalism. The option of a top, side or rear flue gas outlet and the possibility of a side forced ventilation outlet allow the appliance to be installed practically anywhere.

COLOURS

Versione Tinta Unita



Versione Bicolore



pannelli frontali Bianco Antico

cornice porta



pannelli frontali Ardesia

cornice porta



GENERAL TECHNICAL CHARACTERISTICS

Multifuoco System®

Four speed forced ventilation system.
Warm air ducting up to 16 m

Dual Power System

Two independent fans to get different temperatures in separate rooms

Multifunction remote control

LCD display, timer, thermostat and Multicomfort function

Programming

Daily, weekly and weekend modes. Dual time settings.

Remote Control System

Optional kit for remote control of stove with a simple SMS

Structure

Enamelled steel with door, brazier and firebox in cast iron

Majolica cladding

Unique large hand-made pieces

Air Glass System

Self-cleaning ceramic glass resistant up to 750°C

Energy Saving

Quick and easy maintenance, removable ash drawer

Wellness

Humidifier with aroma diffuser


Eco function

Automatic power control of the fire

Pellet Level Sensor

Allows to monitor the amount of pellet in the hopper, displaying an alert when refilling is required.

TECHNICAL DRAWING

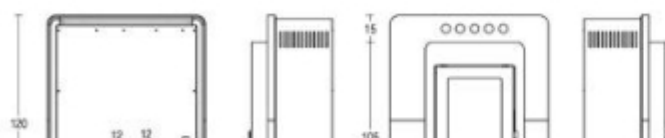

TECHNICAL DATA


Room heating capacity (min-max)	m ²	190 - 325
Rated heat output (min-max)	kW	3,5 - 11,3
Power adjustable (positions)		5
Nominal thermal efficiency	%	90,0
Consumption at rated heat output (min-max)	Kg/h	0,8 - 2,6
Dimensions WxDxH	cm	88x46x120
Cladding/front		majolica
Top		steel
Firebox		steel
Baffle plate/Firebox/Brazier		cast iron
Flue outlet Ø	cm	8 - rear
Flue direction options		right and left side, top right
Ash drawer		removable
Door		cast iron - steel
Ceramic glass		resistant up to 750°C
Door handle		steel with nickel plated finish
Hopper capacity	Kg	30
Umidifier in stainless steel		yes
Oven in stainless steel (LxWxH)	cm	no
Multifuoco System®		4 levels speed
Dual Power		yes
Remote control		display LCD
Stove control panel		with digital control
Timer-thermostat with programming		Daily, weekly and week-end with two times
Remote Control System		optional
Front air vents adjustable		yes - yes
Lateral vents		optional right / left
Minimum power consumption	Watt	150
Maximum power consumption	Watt	430
Total weight	Kg	191

Poiché l'azienda è costantemente impegnata nel continuo perfezionamento di tutta la sua produzione, le caratteristiche estetiche e dimensionali, i dati tecnici e gli accessori possono essere soggetti a variazione.

Numero Verde
800-842026
www.piazzetta.it

 **PIAZZETTA**
PASSIONE ACCESA

Copyright c 2010. Tutti i diritti sulle immagini ed i testi sono riservati. Sono vietate la riproduzione e diffusione, anche parziale, in qualsiasi forma, delle fotografie e dei testi. I trasgressori saranno perseguiti a norma di legge. Tutti i prodotti illustrati costituiscono creazione di proprietà della società Gruppo Piazzetta SpA. Ogni diritto di sfruttamento dei modelli è riservato. Il marchio ed i segni distintivi della società sono di proprietà esclusiva della stessa.

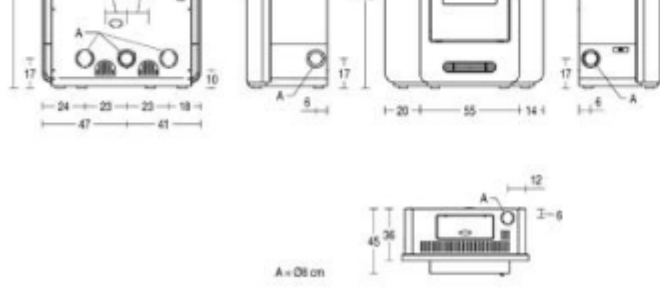

Calculated based on nominal heat output and refers to rooms with a thermal requirement between 0.060 and 0.035 kW per m².

The availability of models may vary from Country to Country.

Poichè l'azienda è costantemente impegnata nel continuo perfezionamento di tutta la sua produzione, le caratteristiche estetiche e dimensionali, i dati tecnici e gli accessori possono essere soggetti a variazione.

Numero Verde
800-842026
www.piazzetta.it

