

Copyright © 2010. Tutti i diritti sulle immagini ed i testi sono riservati. Sono vietate la riproduzione e diffusione, in qualsiasi forma, delle fotografie e dei testi. I trasgressori saranno perseguiti a norma di legge. Tutti i prodotti illustrati costituiscono creazione di proprietà della società Gruppo Piazzetta SpA. Ogni diritto di sfruttamento dei modelli è riservato. Il marchio ed i segni distintivi della società sono di proprietà esclusiva della società.



P960

A perfect harmony of technology and design. This stove has been designed for heating medium-large environments.

COLOURS



GENERAL TECHNICAL CHARACTERISTICS

Multifluoco System®

Four speed forced ventilation system.
Warm air ducting up to 16 m

Dual Power System

Two independent fans capable of climate zone control

Multifunction remote control

LCD display, timer, thermostat and Multifunction function

Programming

Daily, weekly and weekend modes
Dual time settings

Remote Control System

Optional kit for remote control of stove with a simple SMS

Structure

Enamelled steel with door, brazier and firebox in cast iron

Majolica cladding

Unique large hand-made pieces

Air Glass System

Self-cleaning ceramic glass resistant up to 750°C


Easy Cleaning

Quick and easy maintenance, removable ash drawer

Wellness

Humidifier with aroma diffuser

TECHNICAL DRAWING

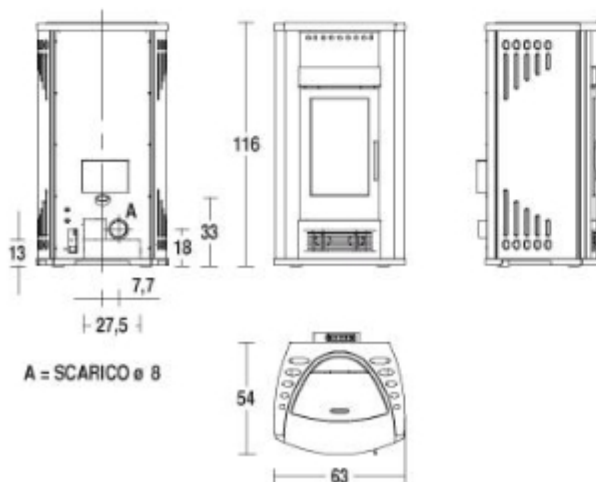

TECHNICAL DATA

Room heating capacity (min-max)	m ²	200 - 345
Rated heat output (min-max)	kW	3,7 - 12,0
Power adjustable (positions)		5
Nominal thermal efficiency	%	87,5
Consumption at rated heat output (min-max)	Kg/h	0,9 - 2,7
Dimensions WxDxH	cm	63 x 58 x 116
Cladding/front		majolica
Top		majolica - steel
Firebox		steel
Baffle plate/Firebox/Brazier		cast iron
Flue outlet Ø	cm	Ø8
Flue direction options		
Ash drawer		removable
Door		cast iron
Ceramic glass		resistant up to 750°C
Door handle		steel with nickel plated finish
Hopper capacity	Kg	35
Umidifier in stainless steel		yes
Oven in stainless steel (LxWxH)	cm	no
Multifluoco System®		4 levels speed
Dual Power		yes
Remote control		display LCD
Stove control panel		with digital controls
Timer-thermostat with programming		daily, weekly and week-end with two times
Remote Control System		optional
Front air ventso ntable		yes - yes
Lateral vents		
Minimum power consumption	Watt	150
Maximum power consumption	Watt	430
Total weight	Kg	200

Calculated based on nominal heat output and refers to rooms with a thermal requirement between 0.060 and 0.035 kW per m².

The availability of models may vary from Country to Country.